




SlowStop® 4" Bollard Sign Post (SS4Y-42-SP)

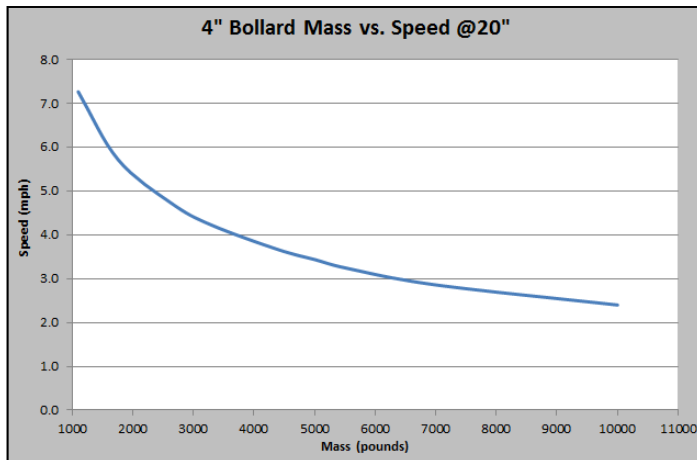

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4" (3.5" ANSI Schedule 40)

Bollard Height: 42"


Sign Height: 60" above ground (ADA) for 12" x 18" sign placard

Set Screws: 5 M16 x 2.00
8mm Hex

Fill: Foam fill by customer



Installs with four (4)
5/8" x 5-1/2"
Concrete Anchor Screws



SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating plus Powder Coat C5I Rated.
- Aluminum post and brackets included
- Available with sign placards.

RECOMMENDED USES

- Parking Lot Handicap Parking Spots
- Reserved Parking Spaces
- Sign face can be added for a variety of uses
- Post-tensioned Concrete
- For use without costly wheel stops
- Avoid trip hazards in pedestrian travel lanes



SLOWSTOP
GUARDING
SYSTEMS

Tel: (626) 257-8328 | sales@sharp-line-solutions.com
www.sharp-line-solutions.com